




CLEAR VIEW

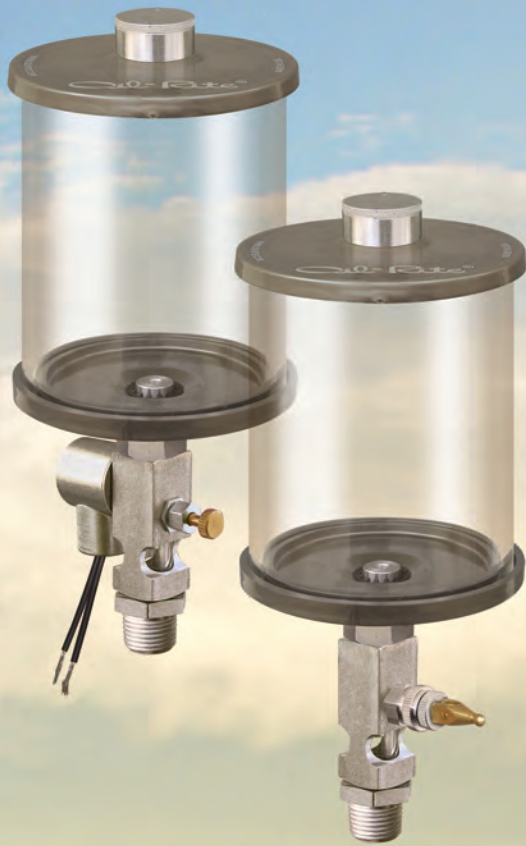

Clear View Reservoir Single Feed Lubricators

Manual and Solenoid Operated

Clear View lubricators utilize a style reservoir that provides optimum viewing. They offer the same durability as heavier cast or steel components, but have the advantage of a streamlined design and standout pricing.

- Fewer components for a cleaner line of sight
- Permanent bond eliminates gaskets
- Light weight for more stable mounting and reduced freight costs
- Universal fitting allows reservoir to be switched out for a different capacity
- Durable polycarbonate endplates have exceptional chemical compatibility
- Swivel cap swings clear of opening and can't be misplaced
- Endplates manufactured with partial reground material for zero waste
- Available in acrylic or Pyrex (glass)

B4460-032AB12064W

Single Feed Electro Lubricator

Reservoir Capacity in Ounces (2, 5, 9, 16, 32, 64, 128)

Viewing Material (A = Acrylic, P = Pyrex)

Seal Material (B = Buna, V = Viton)

Voltage

Frequency (5 = 50, 6 = 60, D = DC)

Mounting (1 = 1/8 NPT, 2 = 1/4 NPT, 3 = 3/8 NPT, 4 = 1/2 NPT, R = Remote)

Identifies Oil-Rite Product

B4461-032AB4W

Single Feed Manual Lubricator

Reservoir Capacity in Ounces (2, 5, 9, 16, 32, 64, 128)

Viewing Material (A = Acrylic, P = Pyrex)

Seal Material (B = Buna, V = Viton)

Mounting (1 = 1/8 NPT, 2 = 1/4 NPT, 3 = 3/8 NPT, 4 = 1/2 NPT, R = Remote)

Identifies Oil-Rite Product

Single feed lubricators dispense oil through a valve that controls the flow rate. A precision needle valve adjusts the drip rate from a few drops per minute to a continuous flow. The integrated friction lock can be used to maintain a desired setting. The manual version is turned on and off with a toggle switch. The electro lubricator operates with a sole-

noid. Standard voltage is 120V/60Hz.

Single feed lubricators supply oil to a brush, roller, felt pad, or directly to the surface that requires lubrication. They have diverse uses including chains, gears, rails, shafts, bearings, and pivot points.

The viewing portion of the reservoir is available in acrylic or Pyrex (glass). The

reservoir endplates are polycarbonate. The valve body is aluminum with a glass sight. The needle valve is brass. Fittings are plated steel. The seal at the reservoir is Viton and seals located at the valve are Buna-N (or can be specified as Viton).



CLEAR VIEW



Clear View Reservoir Single Feed Lubricators

Manual and Solenoid Operated

Clear View lubricators utilize a style reservoir that provides optimum viewing. They offer the same durability as heavier cast or steel components, but have the advantage of a streamlined design and standout pricing.

- Fewer components for a cleaner line of sight
- Permanent bond eliminates gaskets
- Light weight for more stable mounting and reduced freight costs
- Universal fitting allows reservoir to be switched out for a different capacity
- Durable polycarbonate endplates have exceptional chemical compatibility
- Swivel cap swings clear of opening and can't be misplaced
- Endplates manufactured with partial reground material for zero waste
- Available in acrylic or Pyrex (glass)

B4460-032AB12064W

Single Feed Electro Lubricator

Reservoir Capacity in Ounces (2, 5, 9, 16, 32, 64, 128)

Viewing Material (A = Acrylic, P = Pyrex)

Seal Material (B = Buna, V = Viton)

Voltage

Frequency (5 = 50, 6 = 60, D = DC)

Mounting (1 = 1/8 NPT, 2 = 1/4 NPT, 3 = 3/8 NPT, 4 = 1/2 NPT, R = Remote)

Identifies Oil-Rite Product

B4461-032AB4W

Single Feed Manual Lubricator

Reservoir Capacity in Ounces (2, 5, 9, 16, 32, 64, 128)

Viewing Material (A = Acrylic, P = Pyrex)

Seal Material (B = Buna, V = Viton)

Mounting (1 = 1/8 NPT, 2 = 1/4 NPT, 3 = 3/8 NPT, 4 = 1/2 NPT, R = Remote)

Identifies Oil-Rite Product

Single feed lubricators dispense oil through a valve that controls the flow rate. A precision needle valve adjusts the drip rate from a few drops per minute to a continuous flow. The integrated friction lock can be used to maintain a desired setting. The manual version is turned on and off with a toggle switch. The electro lubricator operates with a sole-

noid. Standard voltage is 120V/60Hz.

Single feed lubricators supply oil to a brush, roller, felt pad, or directly to the surface that requires lubrication. They have diverse uses including chains, gears, rails, shafts, bearings, and pivot points.

The viewing portion of the reservoir is available in acrylic or Pyrex (glass). The

reservoir endplates are polycarbonate. The valve body is aluminum with a glass sight. The needle valve is brass. Fittings are plated steel. The seal at the reservoir is Viton and seals located at the valve are Buna-N (or can be specified as Viton).